

FL5-3K-24V

FLATLINE™-SERIES | 5 INCH LED FIXTURE


Fixture Type: _____

Project: _____


Location: _____

PRODUCT FEATURES


- 90 CRI
- Dimmable
- 50,000 hour life
- UL-listed for indoor use
- Concealed mounting hardware
- Connect up to 96W per power feed
- For use with remote 24V power supplies

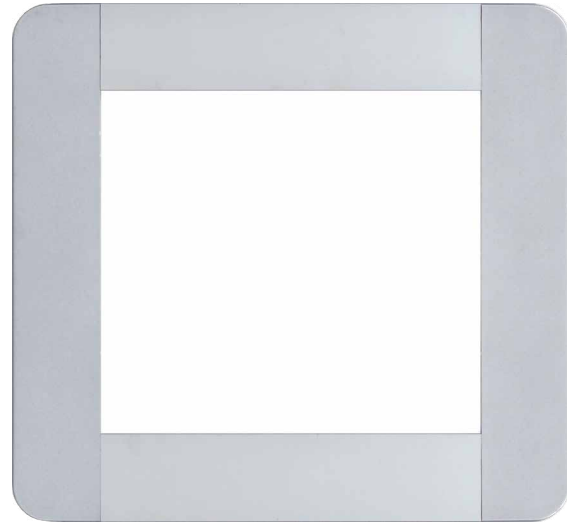

KELVIN COLOR TEMPERATURE SCALE

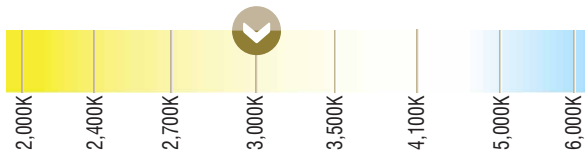


DIMENSIONS

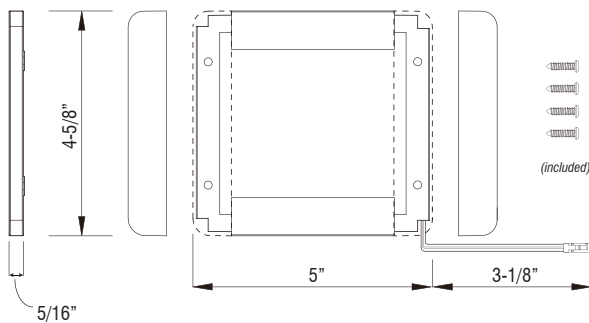

SPECIFICATIONS

Model	FL5-3K-24V
Input Voltage	24V DC / Constant Voltage
Beam Angle	150°
Color Temperature	3000K
CRI	90
Lumens	240
Dimming Options	PWM, Triac, 0-10V, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
Power	5W
Dimensions L*W*D	5" x 4-5/8" x 5/16"
Power Feed Length	3-1/8" (attached)
Power Feed Extension	72" (included)

INCLUDED POWER FEED



FL12-3K-24V

FLATLINE™-SERIES | 12 INCH LED FIXTURE

Fixture Type: _____

Project: _____

Location: _____




PRODUCT FEATURES

- 90 CRI
- Dimmable
- 50,000 hour life
- UL-listed for indoor use
- Concealed mounting hardware
- Connect up to 96W per power feed
- For use with remote 24V power supplies


SPECIFICATIONS

Model	FL12-3K-24V
Input Voltage	24V DC / Constant Voltage
Beam Angle	150°
Color Temperature	3000K
CRI	90
Lumens	470
Dimming Options	PWM, Triac, 0-10V, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
Power	9W
Dimensions L*W*D	12-13/16" x 4-5/8" x 5/16"
Power Feed Length	3-1/8" (attached)
Power Feed Extension	72" (included)


KELVIN COLOR TEMPERATURE SCALE

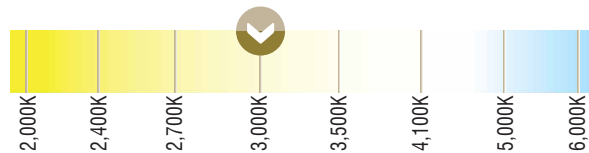

DIMENSIONS

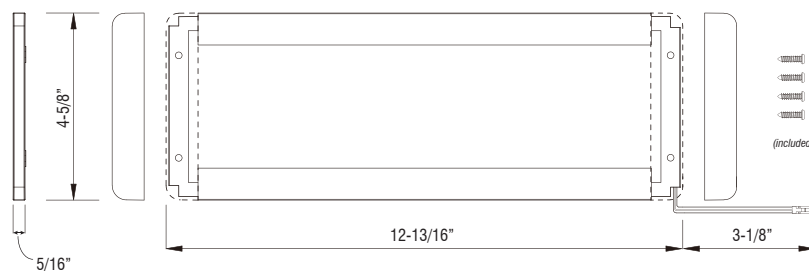

INCLUDED POWER FEED




FL24-3K-24V

FLATLINE™-SERIES | 24 INCH LED FIXTURE

Fixture Type: _____

Project: _____

Location: _____

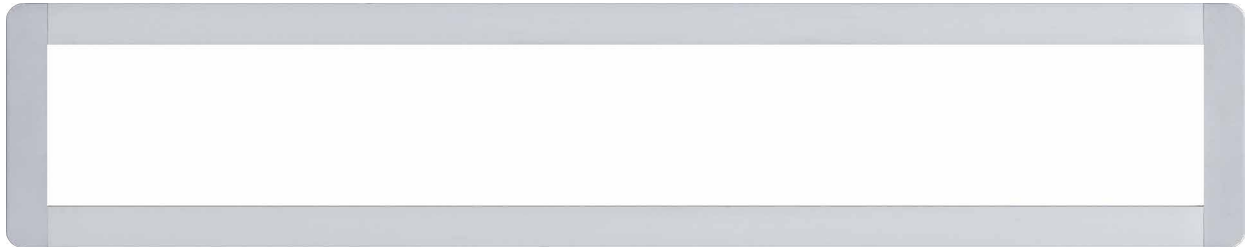


PRODUCT FEATURES

- 90 CRI
- Dimmable
- 50,000 hour life
- UL-listed for indoor use
- Concealed mounting hardware
- Connect up to 96W per power feed
- For use with remote 24V power supplies


SPECIFICATIONS

Model	FL24-3K-24V
Input Voltage	24V DC / Constant Voltage
Beam Angle	150°
Color Temperature	3000K
CRI	90
Lumens	920
Dimming Options	PWM, Triac, 0-10V, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)
Power	18W
Dimensions L*W*D	23-5/8" x 4-5/8" x 5/16"
Power Feed Length	3-1/8" (attached)
Power Feed Extension	72" (included)


KELVIN COLOR TEMPERATURE SCALE

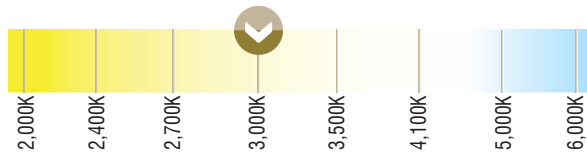

DIMENSIONS

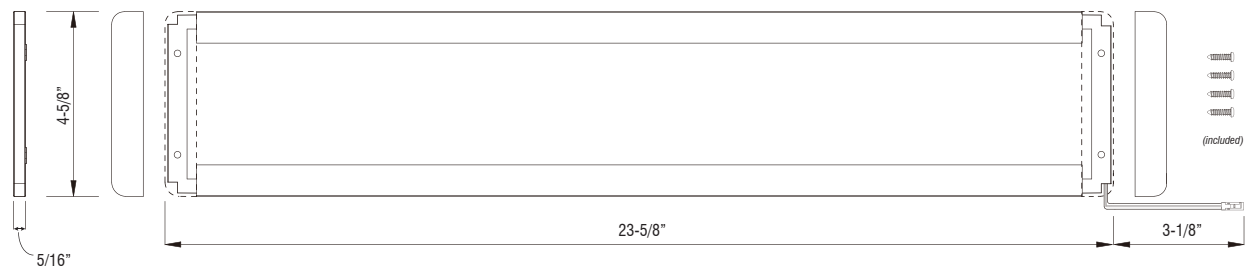

INCLUDED POWER FEED



FLATLINE™ SERIES


ACCESSORIES

Fixture Type: _____


Project: _____

Location: _____


FL-Y2 Y-Cable

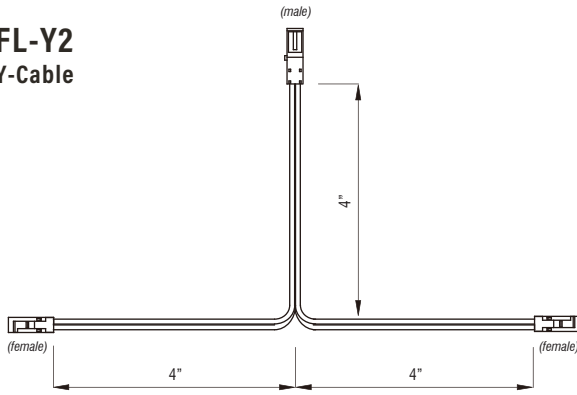


FL-CC-10 10" Jumper Cable



FL-CC-20 20" Jumper Cable



FL-CC-72 72" Jumper Cable



WIRING EXAMPLE

