

# HC3RGBW-WR-24V (OUTDOOR)


3000K | COLOR CHANGING | RUBBER COATED

LINEAR LED LIGHTING

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

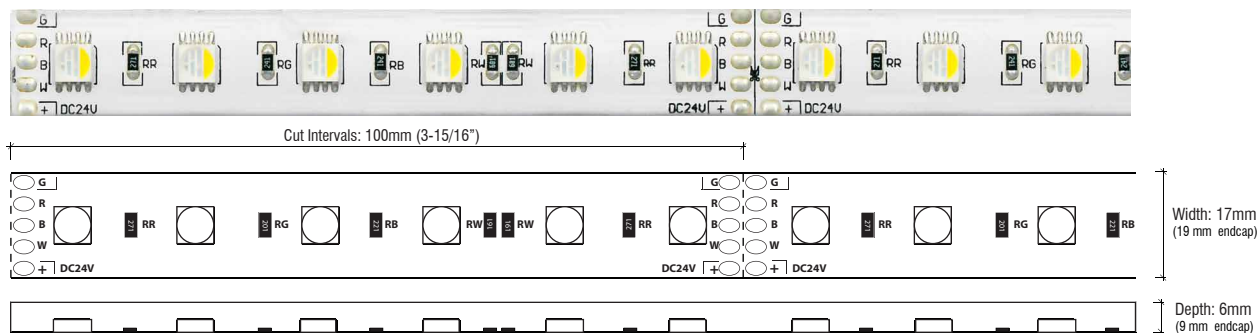


## PRODUCT FEATURES

- 90+ CRI
- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor and outdoor use
- 3M™ industrial adhesive backing
- For use with electronic power supplies

## SPECIFICATIONS

Model	HC3RGBW-WR-24V (Outdoor)
Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Run Length	Unlimited, power every 30ft
Cut Intervals	3-15/16" (100mm)
End Cap Dimensions	3/4" (19mm) x 3/8" (9mm)
Tape Dimensions	11/16" (17mm) x 1/4" (6mm)
Lumens	340 max. lm/ft
CRI	3000K = 90+
Diode	Epistar 5050
Dimming Options	RF, WiFi, DMX
Temp Range	-40°F (-40°C) to 149°F (65°C)
Rating	IP67

## RGB COLOR SPECTRUM



## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft
4.8	9.8	14.4	19.2	23.7	28.5	32.8	37.1	41.3	45.1	50.3	53.8	57.6	60.9	63.7
16ft	17ft	18ft	19ft	20ft	21ft	22ft	23ft	24ft	25ft	26ft	27ft	28ft	29ft	30ft
66.7	69.2	72	74.7	77.2	79.5	82	84.1	86.2	87.8	88.9	89.2	90.1	91.1	93.3

Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.0

