

# MODULIGHT™ (INDOOR)

ML2X-SERIES | LED FIXTURE

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## PRODUCT FEATURES

- 120V Input Voltage
- Linkable up to 200W
- Dimmable
- 50,000 hour life
- ETL-Listed for indoor use
- No diode imaging
- Curved lens provides 180° beam




## SPECIFICATIONS

MODEL:	ML2X-1	ML2X-2	ML2X-3	ML2X-4
Input Voltage	120V AC	120V AC	120V AC	120V AC
Wattage	8W	15W	25W	30W
Lumens @ 3000K	648	1215	2025	2430
Lumens @ 4000K	720	1350	2250	2700
CRI	84	84	84	84
Diodes (SMD3014)	72	140	240	328
Length	11"	21.75"	34.25"	45.25"
Height	1.5"	1.5"	1.5"	1.5"
Width	1.75"	1.75"	1.75"	1.75"


## DIMENSIONS



TOP VIEW




SIDE VIEW



END VIEW

## ORDERING INFORMATION

Example: **ML2X-2-3K**

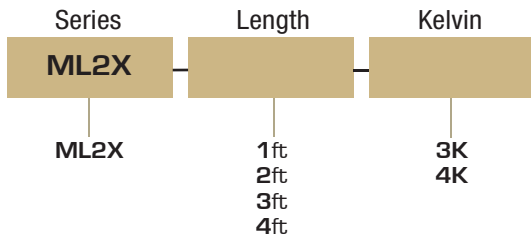

## KELVIN COLOR TEMPERATURE SCALE

