


STIX™ (INDOOR)

ST-SERIES | SNAP-TOGETHER | LINEAR LED LIGHTING

Fixture Type: _____

Project: _____

Location: _____

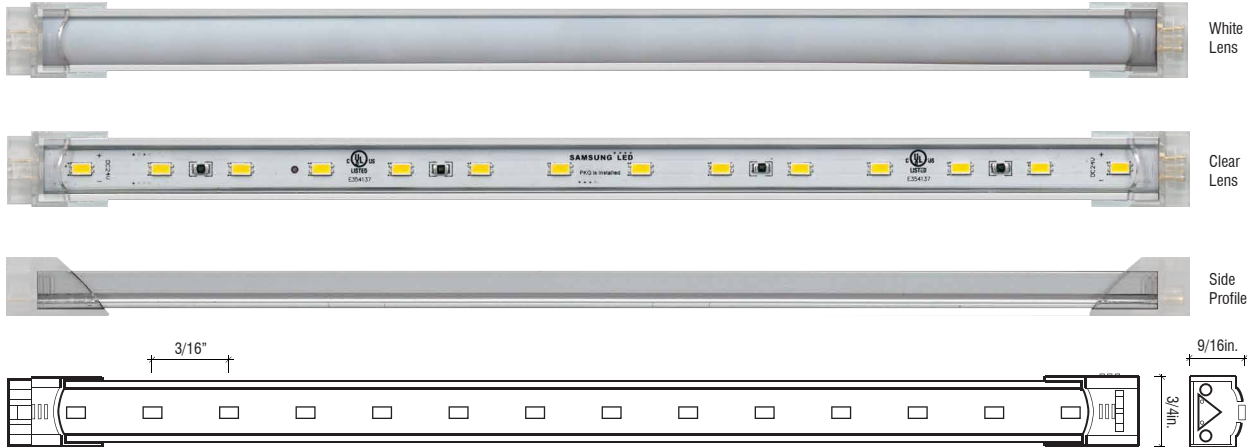

PRODUCT FEATURES

- IP60
- Linkable
- Dimmable
- 50,000 hour life
- Five lengths available
- UL-listed for indoor use
- For use with 24V power supply

SPECIFICATIONS

Series	ST - Stix™
Input Voltage	24V DC / Constant Voltage
Beam Spread	120°
Max Run Length	Unlimited, power every 16ft
Lumens/ft	322(27K), 330(3K), 340(35K), 347(41K)
Watts/ft	3.9W
CRI	85
Diode	Samsung 5630
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-13°F (-25°C) to 140°F (60°C)

ORDERING INFORMATION

Example: **ST-12-CL-3K**

Series	Length	Lens	Kelvin
ST			
ST - Stix™	06 - 6-1/4" 12 - 12-1/8" 24 - 23-9/16" 36 - 35-3/8" 48 - 47-3/16"	CL - Clear WH - White	27K - 2700K 3K - 3000K 35K - 3500K 41K - 4100K

Conforms to ANSI/UL Standard 2108
Certified to CAN/CSA Standard C22.2 No. 250.0



STIX™ (INDOOR)

ACCESSORIES


JUMP COUPLER (not included)



Length	SKU#	12in	ST-JC-12
2in	ST-JC-2	24in	ST-JC-24
6in	ST-JC-6	48in	ST-JC-48

**Custom Lengths Available*

HARDWIRE POWER FEED (not included)

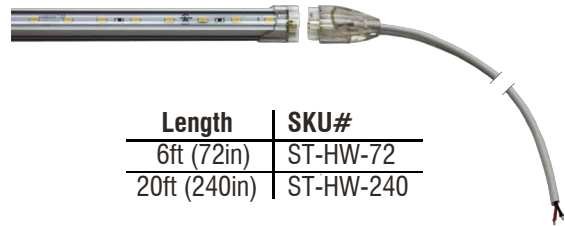

Length	SKU#
6ft (72in)	ST-HW-72
20ft (240in)	ST-HW-240

**Custom Lengths Available*

MOUNTING CLIPS (included)



SKU#
ST-MC


APPLICATION EXAMPLES



Retail Displays



Under Cabinet

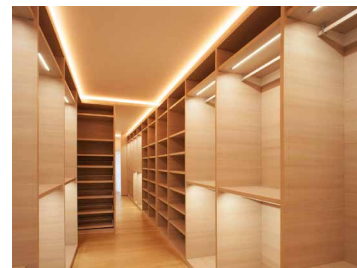

Cove



Toekick



Shelving



Accent Lighting