

# THIN LINE (INDOOR)

TL-SERIES | LINEAR LED LIGHTING

Fixture Type: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



Cut Intervals: 38.7mm (2-13/16in)



MODEL:	TL27K-24V	TL3K-24V	TL35K-24V	TL41K-24V	TL5K-24V
<b>Kelvin</b>	2700K	3000K	3500K	4100K	5000K
<b>Lumens</b>	193 lm/ft	210 lm/ft	227 lm/ft	244 lm/ft	260 lm/ft


## PRODUCT FEATURES

- Dimmable
- 50,000 hour life
- 5-year warranty
- UL-listed for indoor use
- 3M Industrial adhesive backing
- For use with 24V power supplies

## SPECIFICATIONS

Series	TL - Thinline (Indoor)
Input Voltage	24V DC / Constant Voltage
Beam Spread	175°
Max Run Length	Unlimited, power every 12ft
Cut Intervals	2-13/16in (38.7mm)
Dimensions	3/16in (5mm) x 1/16in (1.5mm)
CRI	90+
Diode	Epistar 1207
Dimming Options	PWM, Triac, 0-10V, DMX, Hi-lume
Temp Range	-40°F (-40°C) to 149°F (65°C)

## KELVIN COLOR TEMPERATURE SCALE

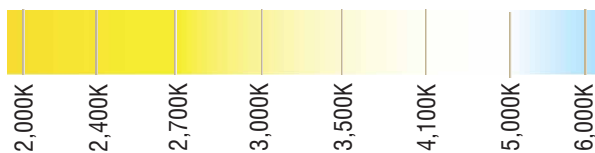

## TOTAL WATTAGE USED AT EACH LENGTH

1ft	2ft	3ft	4ft	5ft	6ft	7ft	8ft	9ft	10ft	11ft	12ft	13ft	14ft	15ft
2.8	5.6	8.3	10.8	13.4	15.5	17.8	19.3	21.5	25.0	26.5	31.3	N/A	N/A	N/A

Conforms to ANSI/UL Standard 2108  
 Certified to CAN/CSA Standard C22.2 No. 250.0

